


ESSER TWIN PIPE 660



DN125 - 4.8" Boom Pipe

PRODUCT FEATURES

- Up to 5 times longer service life than conventional steel pipes.
- The result of continuous technical development in quality in more than 25 years.
- Already the standard for concrete pumps in many countries.

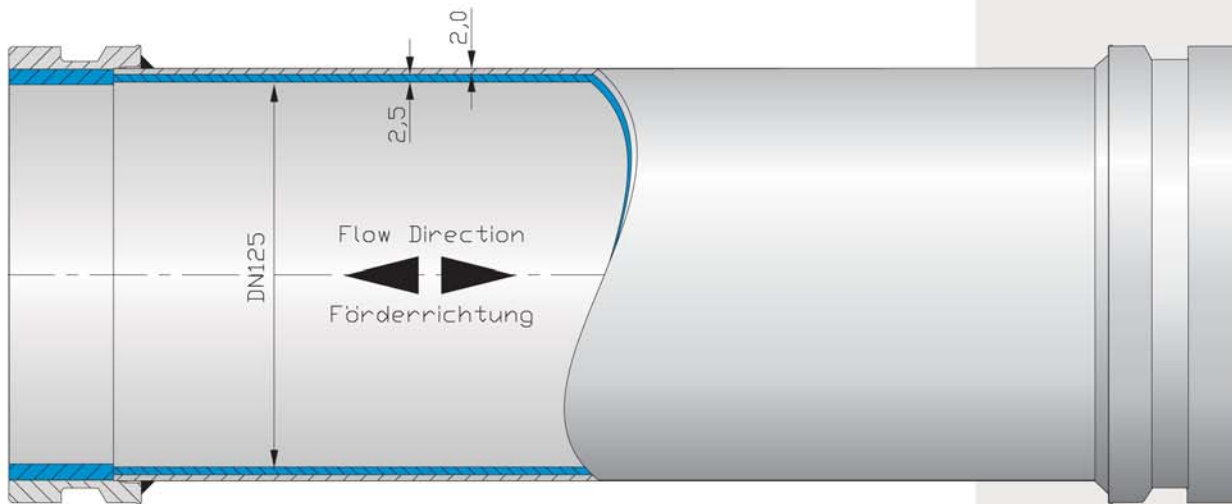

TECHNICAL SPECIFICATIONS

| | |
|--------------------------------|-----------------------------------|
| Boom Pipe: | TWIN PIPE 660 |
| Drawing: | 1-0125-113-0012-00 |
| Dia.: | DN 125 mm - 4.8" |
| Wall Thickness: | 4.5 mm (2.5+2.0) |
| Hardness: | up to 63 HRc |
| Weight (filled with concrete): | 44.1 kg/m - 29.63 lbs/ft |
| Weight (net): | 46.4 kg/3,0m - 102.29 lbs/9.84 ft |
| Max. Working Pressure: | 85 bar - 1233 psi |

Esser Pipe Technology

1733 90th Street
Sturtevant, WI 53177
Phone: (866) 734-0296
Fax: (866) 644-1527
www.esserpipetech.com




ESSER TWIN PIPE 660



DN125 - 4.8" Boom Pipe

PRODUCT FEATURES

- Up to 5 times longer service life than conventional steel pipes.
- The result of continuous technical development in quality in more than 25 years.
- Already the standard for concrete pumps in many countries.

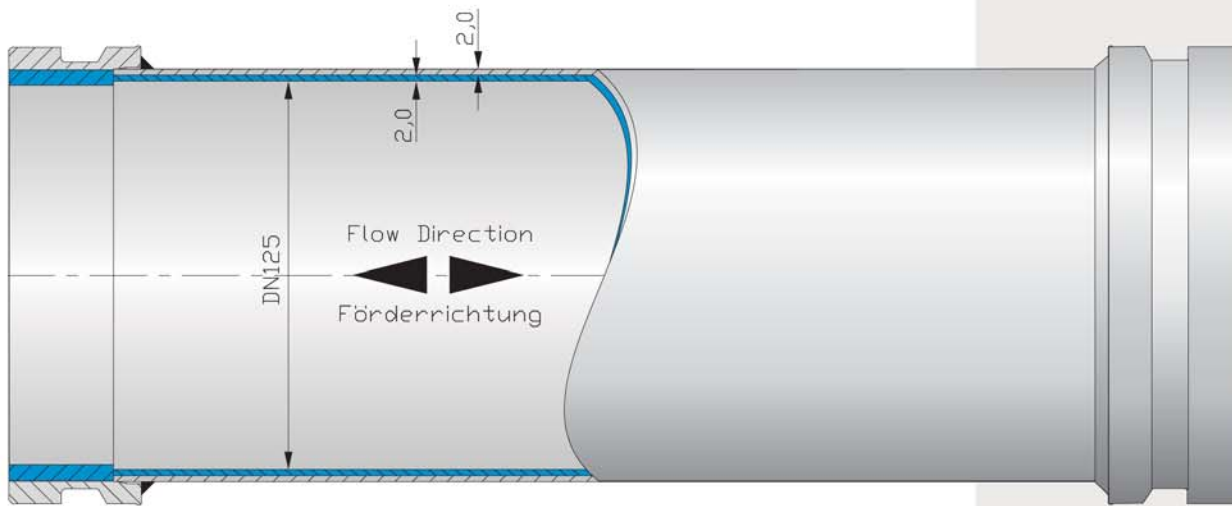

TECHNICAL SPECIFICATIONS

| | |
|--------------------------------|----------------------------------|
| Boom Pipe: | TWIN PIPE 660 |
| Drawing: | 1-0125-113-0041-00 |
| Dia.: | DN 125 mm - 4.8" |
| Wall Thickness: | 4.0 mm (2.0+2.0) |
| Hardness: | up to 63 HRc |
| Weight (filled with concrete): | 43.0 kg/m - 28.89 lbs/ft |
| Weight (net): | 41,5 kg/3,0m - 91.49 lbs/9.84 ft |
| Max. Working Pressure: | 85 bar - 1233 psi |

Esser Pipe Technology

1733 90th Street
Sturtevant, WI 53177
Phone: (866) 734-0296
Fax: (866) 644-1527
www.esserpipetech.com

